

BCY78, VII, VIII, IX, X  
BCY79, VII, VIII, IX, X

**SILICON  
PNP TRANSISTORS**



**TO-18 CASE**



[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR BCY78 and BCY79 series types are silicon PNP epitaxial planar transistors, mounted in a hermetically sealed metal case, designed for low noise amplifier and switching applications.

**MARKING: FULL PART NUMBER**

<b>MAXIMUM RATINGS:</b> ( $T_A=25^\circ\text{C}$ unless otherwise noted)	<b>SYMBOL</b>	<b>BCY78</b>	<b>BCY79</b>	<b>UNITS</b>
Collector-Base Voltage	$V_{CB0}$	32	45	V
Collector-Emitter Voltage	$V_{CEO}$	32	45	V
Emitter-Base Voltage	$V_{EBO}$		5.0	V
Continuous Collector Current	$I_C$		100	mA
Peak Collector Current	$I_{CM}$		200	mA
Peak Base Current	$I_{BM}$		200	mA
Power Dissipation	$P_D$		340	mW
Power Dissipation ( $T_C=25^\circ\text{C}$ )	$P_D$		1.0	W
Operating and Storage Junction Temperature	$T_J, T_{stg}$		-65 to +200	$^\circ\text{C}$
Thermal Resistance	$\theta_{JA}$		450	$^\circ\text{C/W}$
Thermal Resistance	$\theta_{JC}$		150	$^\circ\text{C/W}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

<b>SYMBOL</b>	<b>TEST CONDITIONS</b>	<b>MIN</b>	<b>MAX</b>	<b>UNITS</b>
$I_{CBO}$	$V_{CB}=\text{Rated } V_{CB0}$		15	nA
$I_{CBO}$	$V_{CB}=\text{Rated } V_{CB0}, T_A=150^\circ\text{C}$		10	$\mu\text{A}$
$I_{EBO}$	$V_{EB}=5.0\text{V}$		20	nA
$BV_{CBO}$	$I_C=10\mu\text{A}$ (BCY78)	32		V
$BV_{CBO}$	$I_C=10\mu\text{A}$ (BCY79)	45		V
$BV_{CEO}$	$I_C=2.0\text{mA}$ (BCY78)	32		V
$BV_{CEO}$	$I_C=2.0\text{mA}$ (BCY79)	45		V
$BV_{EBO}$	$I_E=1.0\mu\text{A}$	5.0		V
$V_{CE(\text{SAT})}$	$I_C=10\text{mA}, I_B=250\mu\text{A}$		0.25	V
$V_{CE(\text{SAT})}$	$I_C=100\text{mA}, I_B=2.5\text{mA}$		0.80	V
$V_{BE(\text{SAT})}$	$I_C=10\text{mA}, I_B=250\mu\text{A}$	0.60	0.85	V
$V_{BE(\text{SAT})}$	$I_C=100\text{mA}, I_B=2.5\text{mA}$	0.70	1.20	V
$V_{BE(\text{ON})}$	$V_{CE}=5.0\text{V}, I_C=2.0\text{mA}$	0.60	0.75	V

		<b>BCY78-VII</b>			<b>BCY78-VIII</b>		<b>BCY78-IX</b>		<b>BCY78-X</b>	
		<b>MIN</b>	<b>TYP</b>	<b>MAX</b>	<b>MIN</b>	<b>MAX</b>	<b>MIN</b>	<b>MAX</b>	<b>MIN</b>	<b>MAX</b>
$h_{FE}$	$V_{CE}=5.0\text{V}, I_C=10\mu\text{A}$	-	140	-	30	-	40	-	100	-
$h_{FE}$	$V_{CE}=5.0\text{V}, I_C=2.0\text{mA}$	120	-	220	180	310	250	460	380	630
$h_{FE}$	$V_{CE}=1.0\text{V}, I_C=10\text{mA}$	80	-	-	120	400	160	630	240	1000
$h_{FE}$	$V_{CE}=1.0\text{V}, I_C=100\text{mA}$	40	-	-	45	-	60	-	60	-

R4 (4-June 2013)

BCY78, VII, VIII, IX, X  
BCY79, VII, VIII, IX, X


SILICON  
PNP TRANSISTORS



**ELECTRICAL CHARACTERISTICS - Continued:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$f_T$	$V_{CE}=5.0\text{V}$ , $I_C=10\text{mA}$ , $f=100\text{MHz}$	100		MHz
$C_{ob}$	$V_{CB}=10\text{V}$ , $I_E=0$ , $f=1.0\text{MHz}$		7.0	pF
$C_{ib}$	$V_{EB}=0.5\text{V}$ , $I_C=0$ , $f=1.0\text{MHz}$		15	pF
NF	$V_{CE}=5.0\text{V}$ , $I_C=0.2\text{mA}$ , $R_S=2.0\text{k}\Omega$ , $f=1.0\text{kHz}$ , $B=200\text{Hz}$		10	dB
$t_{on}$	$V_{CC}=3.0\text{V}$ , $I_C=10\text{mA}$ , $I_{B1}=I_{B2}=1.0\text{mA}$		100	ns
$t_d$	$V_{CC}=3.0\text{V}$ , $I_C=10\text{mA}$ , $I_{B1}=I_{B2}=1.0\text{mA}$		50	ns
$t_r$	$V_{CC}=3.0\text{V}$ , $I_C=10\text{mA}$ , $I_{B1}=I_{B2}=1.0\text{mA}$		50	ns
$t_{off}$	$V_{CC}=3.0\text{V}$ , $I_C=10\text{mA}$ , $I_{B1}=I_{B2}=1.0\text{mA}$		700	ns
$t_s$	$V_{CC}=3.0\text{V}$ , $I_C=10\text{mA}$ , $I_{B1}=I_{B2}=1.0\text{mA}$		600	ns
$t_f$	$V_{CC}=3.0\text{V}$ , $I_C=10\text{mA}$ , $I_{B1}=I_{B2}=1.0\text{mA}$		100	ns
$t_{on}$	$V_{CC}=10\text{V}$ , $I_C=100\text{mA}$ , $I_{B1}=I_{B2}=10\text{mA}$		100	ns
$t_d$	$V_{CC}=10\text{V}$ , $I_C=100\text{mA}$ , $I_{B1}=I_{B2}=10\text{mA}$		35	ns
$t_r$	$V_{CC}=10\text{V}$ , $I_C=100\text{mA}$ , $I_{B1}=I_{B2}=10\text{mA}$		65	ns
$t_{off}$	$V_{CC}=10\text{V}$ , $I_C=100\text{mA}$ , $I_{B1}=I_{B2}=10\text{mA}$		400	ns
$t_s$	$V_{CC}=10\text{V}$ , $I_C=100\text{mA}$ , $I_{B1}=I_{B2}=10\text{mA}$		300	ns
$t_f$	$V_{CC}=10\text{V}$ , $I_C=100\text{mA}$ , $I_{B1}=I_{B2}=10\text{mA}$		100	ns

**TO-18 CASE - MECHANICAL OUTLINE**

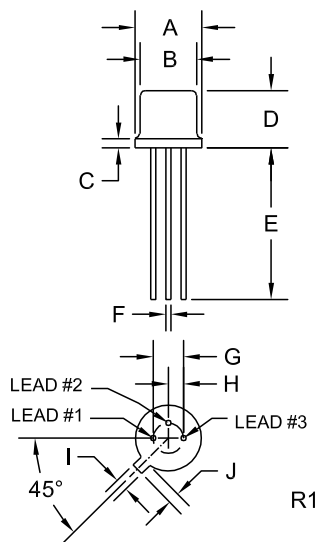

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.209	0.230	5.31	5.84
B (DIA)	0.178	0.195	4.52	4.95
C	-	0.030	-	0.76
D	0.170	0.210	4.32	5.33
E	0.500	-	12.70	-
F (DIA)	0.016	0.019	0.41	0.48
G (DIA)	0.100		2.54	
H	0.050		1.27	
I	0.036	0.046	0.91	1.17
J	0.028	0.048	0.71	1.22

TO-18 (REV: R1)

**LEAD CODE:**

- 1) Emitter
- 2) Base
- 3) Collector

**MARKING:**  
FULL PART NUMBER

R4 (4-June 2013)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Central Semiconductor:

[BCY79-IX](#) [BCY78-X](#) [BCY78-IX](#) [BCY79-VIII](#) [BCY78-VIII](#) [BCY79](#) [BCY79-VII](#) [BCY78-VII](#) [BCY79-X](#) [BCY78-X](#)  
[TIN/LEAD](#) [BCY78-IX TIN/LEAD](#) [BCY78-VII TIN/LEAD](#) [BCY79-VII TIN/LEAD](#) [BCY79-VIII TIN/LEAD](#) [BCY79-X](#)  
[TIN/LEAD](#) [BCY78-VIII TIN/LEAD](#) [BCY79-IX TIN/LEAD](#) [BCY79 TIN/LEAD](#)